



AYR Series Load Disconnectors

**Compact
Dimensions**

Easy Setup



**High Quality
Standards**

**160A(for NH00/NH00C)
250A(For NH1)
model options**

PARAMETERS

AYR.160


With fuse	Rated operating voltage	Ue	V	400 VAC	690 VAC
	Rated operating current	Ie	A	160	100
	Thermal current	Ith	A	160	100
	Rated short-circuit current		kA	100	50
	Isolation voltage	Ui	V	800	
	Rated surge voltage	Uimp	kV	8	
	Electrical durability		times	200	

AYR.250


With fuse	Rated operating voltage	Ue	V	400 VAC	690 VAC
	Rated operating current	Ie	A	250	200
	Thermal current	Ith	A	250	200
	Rated short-circuit current		kA	100	50
	Isolation voltage	Ui	V	800	
	Rated surge voltage	Uimp	kV	8	
	Electrical durability		times	200	

SETUP DIMENSIONS

AYR.160

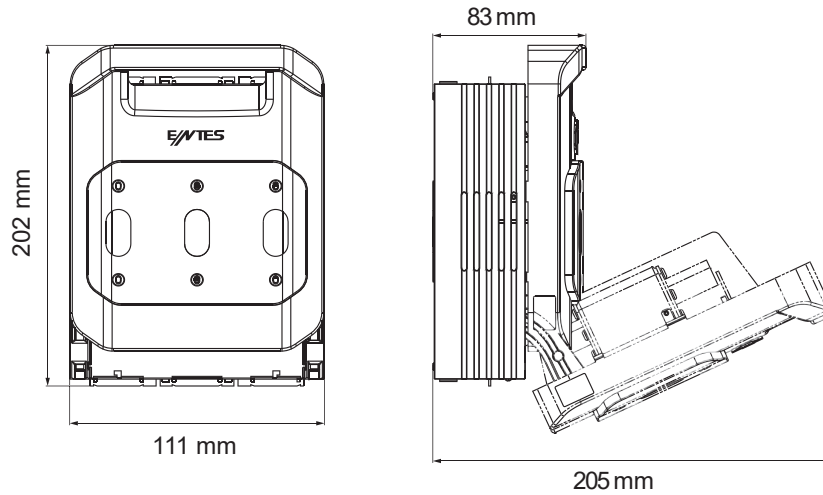

AYR.160

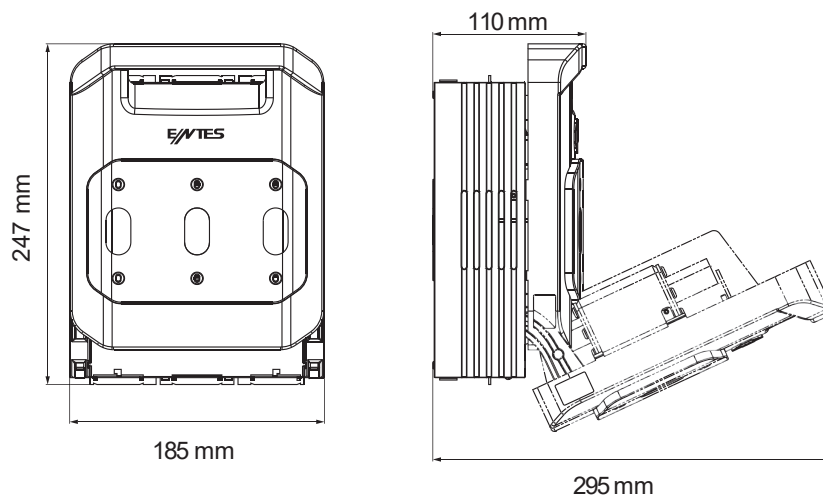

HEADQUARTERS

Address: Dudullu OSB; 1. Cadde; No: 23 34776 Umraniye - ISTANBUL / TÜRKİYE Tel: +90 216 313 01 10 Fax: +90 216 314 16 15 Sales Fax: +90 216 365 71 71
E-mail: contact@entes.eu Web: www.entes.eu Call Center Technical Support: 0850 888 84 25 Coordinates: 40,995852 N, 29,178398 E

INTERNATIONAL BRANCH OFFICES

ISTANBUL : contact@entes.eu Tel: +90 216 313 01 10 Fax: +90 216 314 16 15
INDIA : contact@entes.in Tel: +91 981 - 2980004
GREECE : contact@entes.eu Tel: +30 2310 706999 +30 2310 707296
GERMANY : kontakt@enteselektronik.com Tel: +49(0) 7022-931992-0

© ENTES Elektronik Cihazlar İmalat ve Ticaret A.Ş.

